



ETC Setup Guide

Ion Xe™

Ion Xe Rearpanel

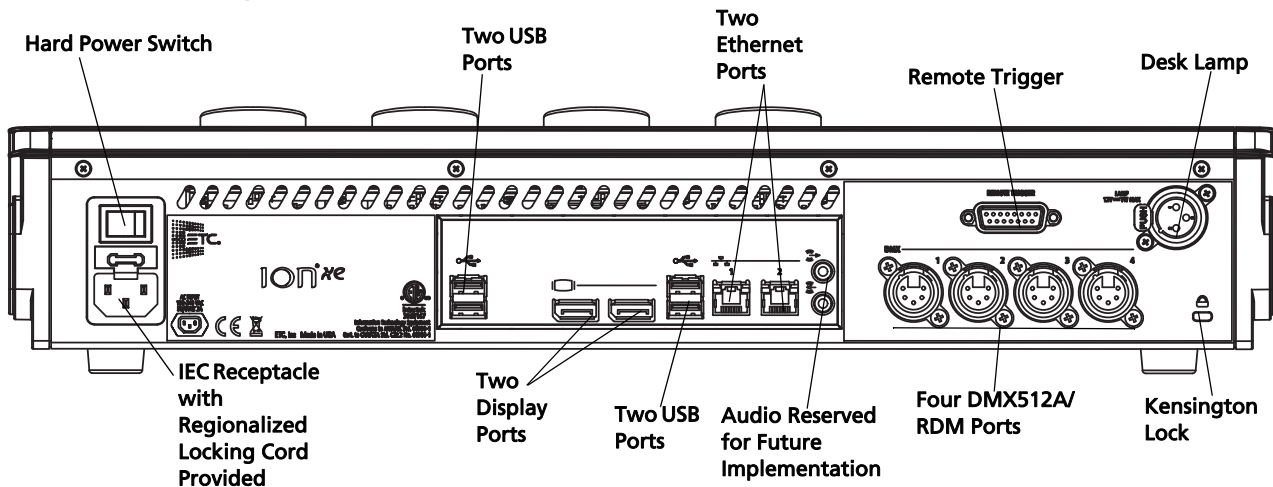

Ion Xe 20 Rearpanel

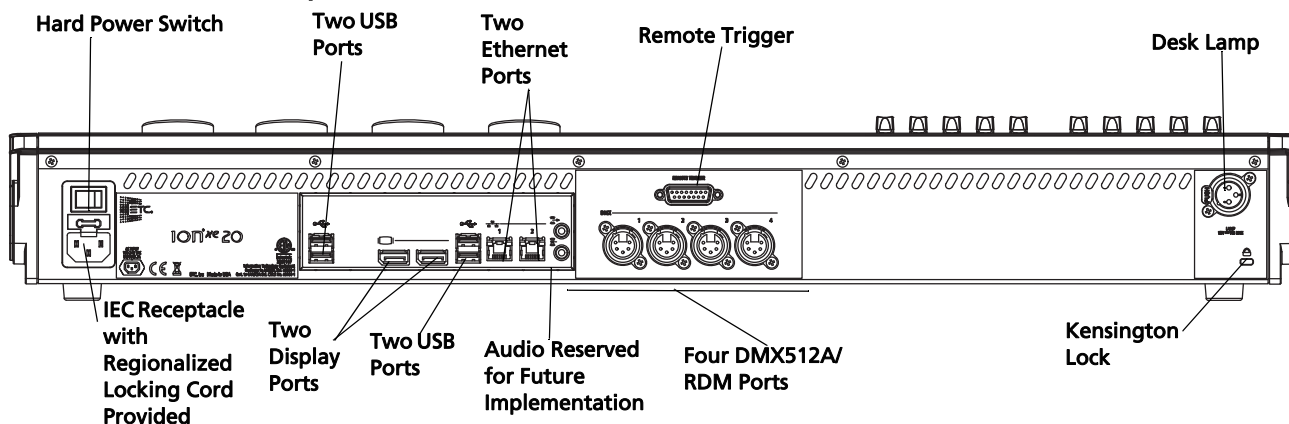

WARNING: This device contains a lithium battery. Battery may explode if mistreated. Do not recharge, disassemble or dispose of in fire.



CAUTION: *For continued protection against risk of fire, replace only with same type and rating of fuse.*

Pour ne pas compromettre la protection contre les risques d'incendie, remplacer par un fusible de même type et de mêmes caractéristiques nominales.



CAUTION: *Power cord must be connected using an earth ground connection.*



Note: *Ion XE ships with two 'active' Display Port-to-DVI adapters. Displays using an 'active' adapter have a max resolution of 1920x1200.*



Corporate Headquarters ■ Middleton, WI, USA ■ Tel +608 831 4116 ■ Service: (Americas) service@etcconnect.com

London, UK ■ Tel +44 (0)20 8896 1000 ■ Service: (UK) service@etc europe.com

Rome, IT ■ Tel +39 (06) 32 111 683 ■ Service: (UK) service@etc europe.com

Holzkirchen, DE ■ Tel +49 (80 24) 47 00-0 ■ Service: (DE) techserv-hoki@etcconnect.com

Hong Kong ■ Tel +852 2799 1220 ■ Service: (Asia) service@etcasia.com

Web: etcconnect.com ■ © 2017 Electronic Theatre Controls, Inc.

Product information and specifications subject to change. ETC intends this document to be provided in its entirety.

4311M2200 ■ Rev A ■ Released 2017-08