

Eos® Series





GENERAL INFORMATION

The Eos motorized fader wings may be used to provide extended playbacks for Eos Ti, Gio, Ion, Eos/Ion RPUs, RVIs, ETCnomad (PC or Mac native) and ETCnomad Puck.

Up to three wings may be attached to any of these devices. There are two wings – a x10 and x20. The x10 has 10 60mm motorized faders, two 4.3" full-color high-resolution displays and three controls buttons. The x20 adds 10 additional faders, two more displays and three controls buttons. The wing provides power sensing and automatically turns on when both an active USB data connections and mains power are provided via the external 12V power supply.

Connected devices must be running Microsoft Windows 7 or higher or Mac OSX Mavericks or later. These wings are NOT compatible with Windows XP.

FEATURES

- Playback layout consistent with Eos Ti and Gio
- Either 10 or 20 pageable playbacks (100 pages are supported)
- Paging/bank conventions are determined in a setup menu
- Button/fader and configuration mapping displayed via fullcolor high-resolution displays.
- Two powered USB ports
- VESA 100x100mm mountable
- Kensington Lock compatible locking point

INTERFACES

- AC Input (100 240VAC at 50/60Hz) with external power supply
- Two USB ports

ORDERING INFORMATION

Eos Motorized Fader Wings

MODEL	DESCRIPTION				
Eos MFW 20	Eos Motorized Fader Wing 20				
Eos MFW 10	Eos Motorized Fader Wing 10				

Eos Motorized Fader Wing Accessories

MODEL	DESCRIPTION					
Net3 RFR	Radio Focus Remote					
Net3 RFR-RX	Net3 Radio Focus Remote, Receiver only					
Net3 RFR - TX	Net3 Radio Focus Remote, Transmitter only					
Eos 2W FC	Eos Combined Wing Flight Case					
Eos PGW	Eos Programming Wing					
ETCnomad (256- 6144)	ETCnomad (256-6144 Output Kit)					
ETCnomad Puck (256-2048)	ETCnomad Puck (256-2048 Output)					

Ships with

- Power supply
- IEC power cord
- Dust cover
- USB cable

The wing is compatible with

- Eos Ti
- Gio
- Ion
- Eos/Ion Remote Processor Units
- RVI/RVI3
- ETCnomad for PC/Mac (requires ETCnomad Lighting Controller Kit and output device)
- ETCnomad Puck

Note: These wings are not supported on Element.



Eos Motorized Fader Wings

Eos Series

PHYSICAL

Eos Motorized Fader Wing Dimensions*


_										
MODEL	HEIGHT		WIDTH		DEPTH					
	inches	mm	inches	mm	inches	mm				
Eos MFW 20	4.27	109	19.67	500	13.42	341				
Eos MFW 10	4.27	109	12.22	310	13.42	341				
Eos PGW with Flight Case	12.45	316	31.59	802	20.47	520				

Eos Motorized Fader Wing Weights*


MODEL	WEI	GHT	SHIPPING WEIGHT		
	lbs	kgs	lbs	kgs	
Eos MFW 20	10.7	4.9	17.1	7.8	
Eos MFW 10	6.2	2.8	12.5	5.7	


^{*}Weights and dimensions typical

EOS MOTORIZED FADER WING 10

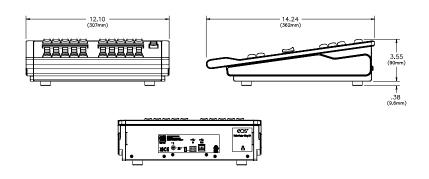

EOS MOTORIZED FADER WING 20









Corporate Headquarters • 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA • Tel +1 608 831 4116 • Fax +1 608 836 1736 London, UK • Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK • Tel +44 (0) 20 8896 1000 • Fax +44 (0) 20 8896 2000 Rome, IT • Via Pieve Torina, 48, 00156 Rome, Italy • Tel +39 (06) 32 111 683 • Fax +44 (0) 20 8752 8486

Holzkirchen, DE • Ohmstrasse 3, 83607 Holzkirchen, Germany • Tel +49 (80 24) 47 00-0 • Fax +49 (80 24) 47 00-3 00

Hong Kong • Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong • Tel +852 2799 1220 • Fax +852 2799 9325

Web • www.etcconnect.com • Copyright©2016 ETC. All Rights Reserved. All product information and specifications subject to change. 4240L1015 Rev. A Printed in USA 06/16